




Flux-cored Welding Torch ARgo-flux 300G, air cooled

Technical Data according to EN 60 974-7


Rating: 300A
Duty cycle: @60%
Wire-Ø: 1,2 – 2,4mm

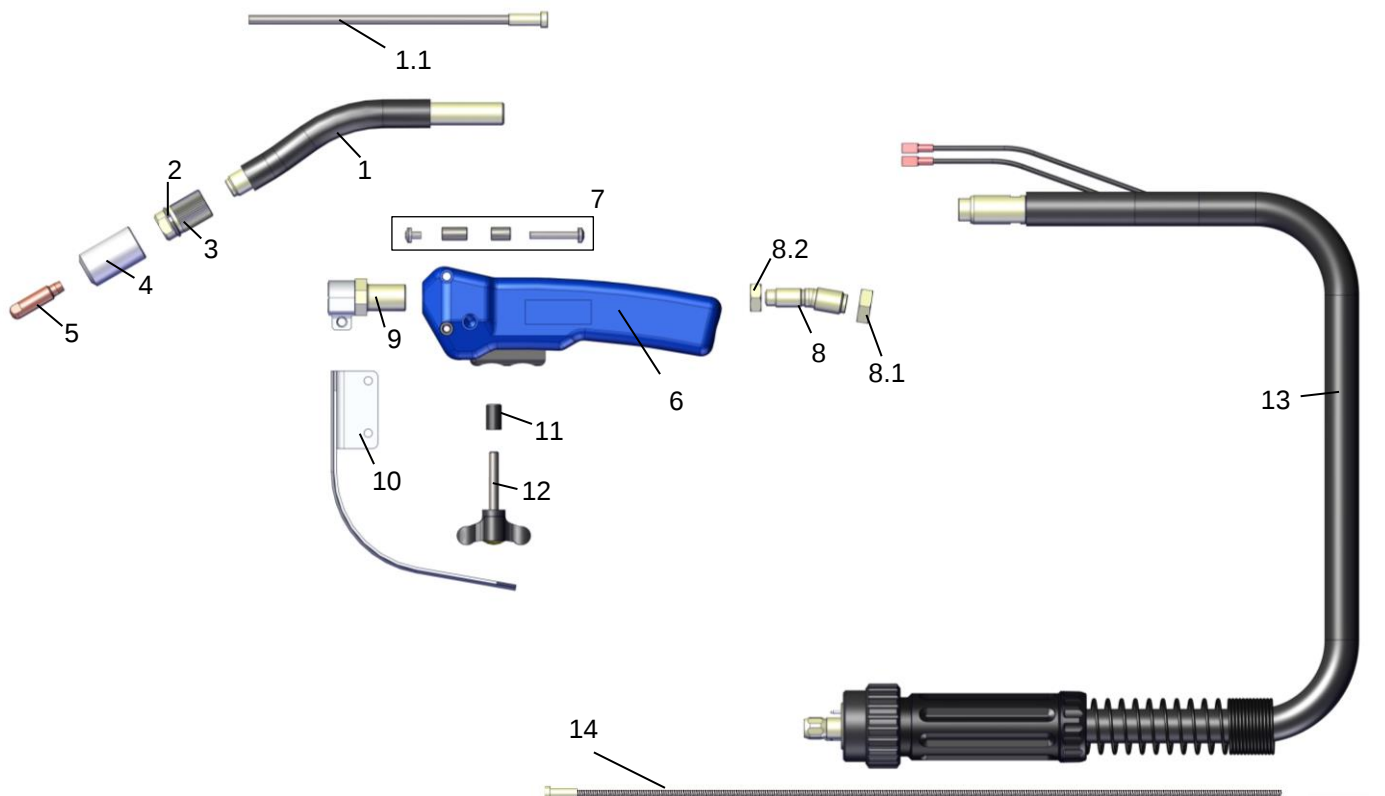

Gun configurator for complete torches

Argo-Flux 300G	Cable length	Necks	Connection
720	30 3,00m 40 4,00m 50 5,00m	1 135mm (6")x30° 2 100mm (6")x60° 3 69mm (8")x90° 4 253mm (12")x60° 5 288mm (12")x30°	0 Euro-Connector 1 Mi-Connector 2 Ln-Connector

Example: 7203010 ARgo-Flux 300G/3m Hals 6" x 30°, Euro-Connection

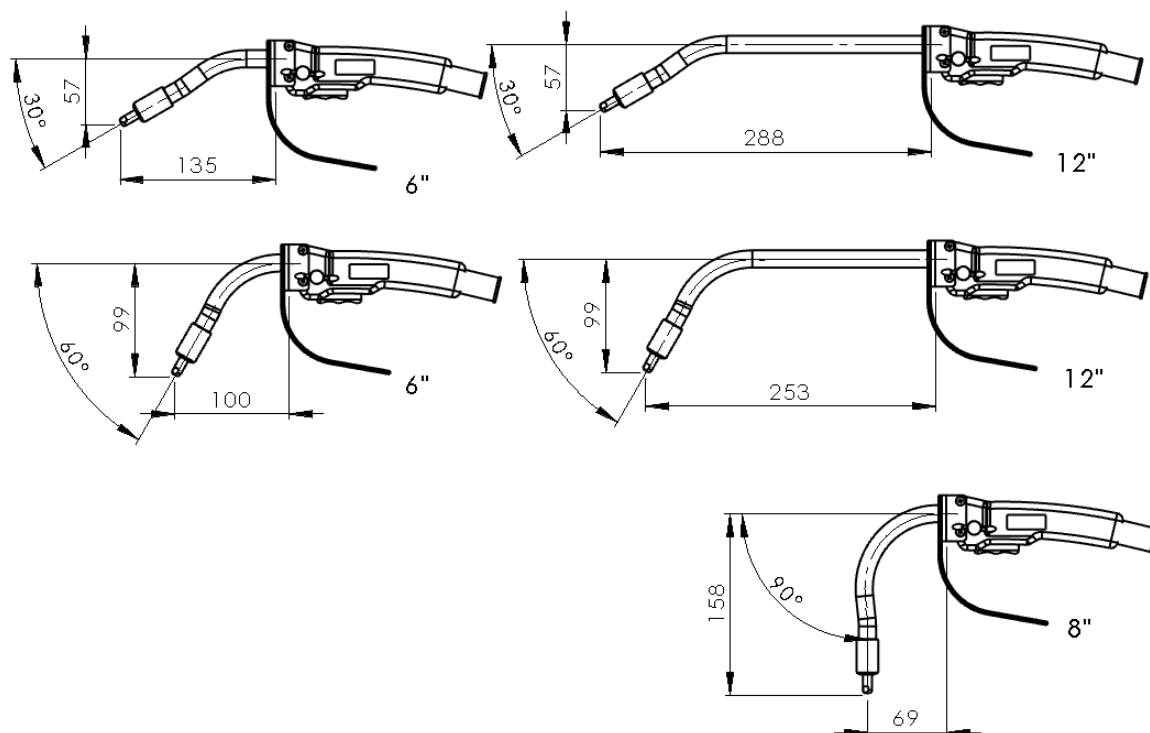

Spare Part List

Pos.	Part no.	Description	Pos.	Part no.	Description
1	7200101	Neck 135mm (6") x 30°	6	7201220	Handle kit
	7200102	Neck 288mm (12") x 30°	7	7201225	Screw kit
	7200103	Neck 100mm (6") x 60°	8	7201226	Adapter ARgo-Flux 300G
	7200104	Neck 253mm (12") x 60°	8.1	000F519	Nut M12x1,5
	7200105	Neck 69mm (8") x 60°	8.2	2150201	Nut M10x1
1.1	7200151	Neck liner 6"	9	7201200	Connection block
	7200152	Neck liner 8"	10	7201210	Heat shield
	7200153	Neck liner 12"	11	7201221	Sleeve
2	7200190	Ring	12	7201222	Neck screw
3	7200195	Flux tip holder (5/16" spezial)	13	30035303	Coaxial cable 3m with special connection
	7200196	Tip holder standard 5/16"		30035403	Coaxial cable 4m with special connection
	7200191	Tip holder M8		30035503	Coaxial cable 5m with special connection
4	7200192	HD-Insulator for tip – Ø8mm	14	3493530	Steel liner 3,5x4,9mm/3m
	7200193	HD-Insulator for tip – Ø10mm		3493540	Steel liner 3,5x4,9mm/4m
5	100035xx	Contact tip E-Cu		3493550	Steel liner 3,5x4,9mm/5m
	100036xx	Contact tip CuCrZr			
Contact tips available in Ø 1.2/1.4/1.6/2.0/2.4 mm Please insert wire diameter at xx. Example: Ø 1,2 mm is: 12; Part. no.: = 10003512					