





Information overview: Cladding Torch CLW 305 – Ø50mm

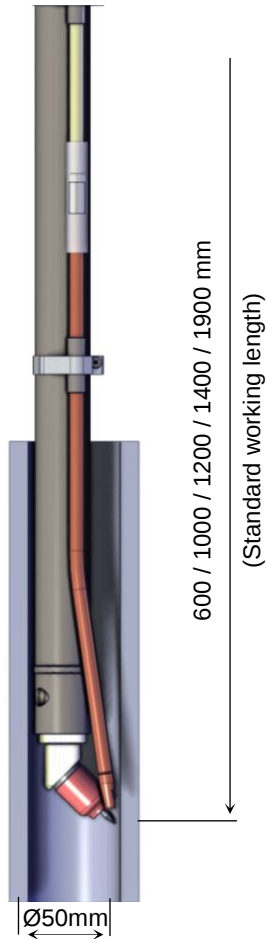



Special features:

- *Efficient torch system (CLW 305: 300A)*
- *100% Duty Cycle*
- *Water cooling system*
- *Torch head 0° - 90°*
- *Quick change torch head*
- *Ready for hot wire*
- *Upgradable to CLW 205 (200A) and CLW 250 (250A)*

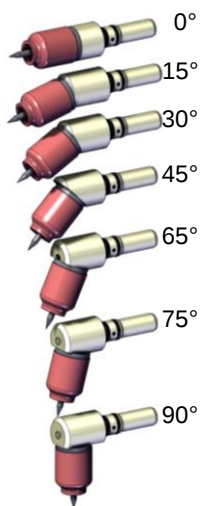

Torch head assembling

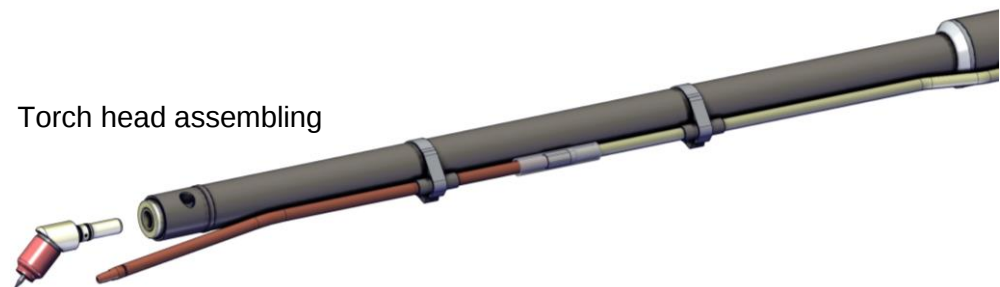

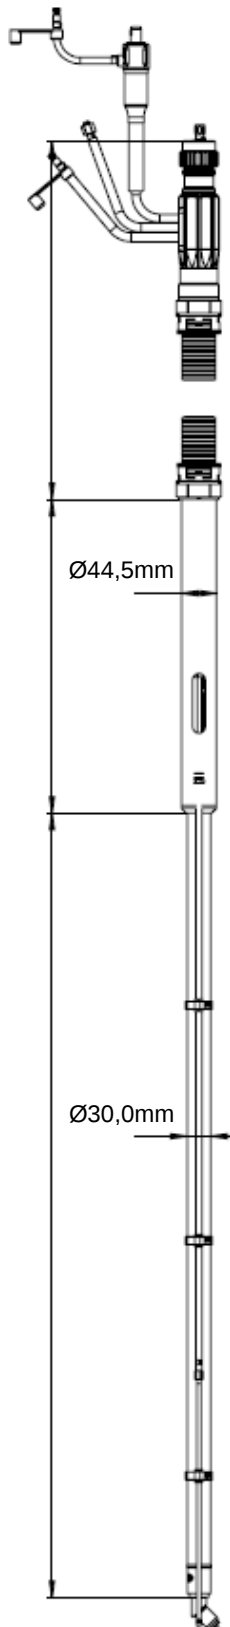

Technical Data CLW 305:

Work piece-inside -Ø 305	50mm min (2 inch)
Welding current	max. 300A (100% ED)
Wire-Ø	0,8 / 1,0 / 1,2mm
Electrode-Ø	2,4 / 3,2 / 4,0mm
Flow rate cooling water	min. 2l/min
A	600 / 1000 / 1200 / 1400 / 1900mm
B	400mm
C	On request

- Cable assembly connections according to customer specifications
- Optionally available as hot or cold wire
- Optional twin wire feed available